


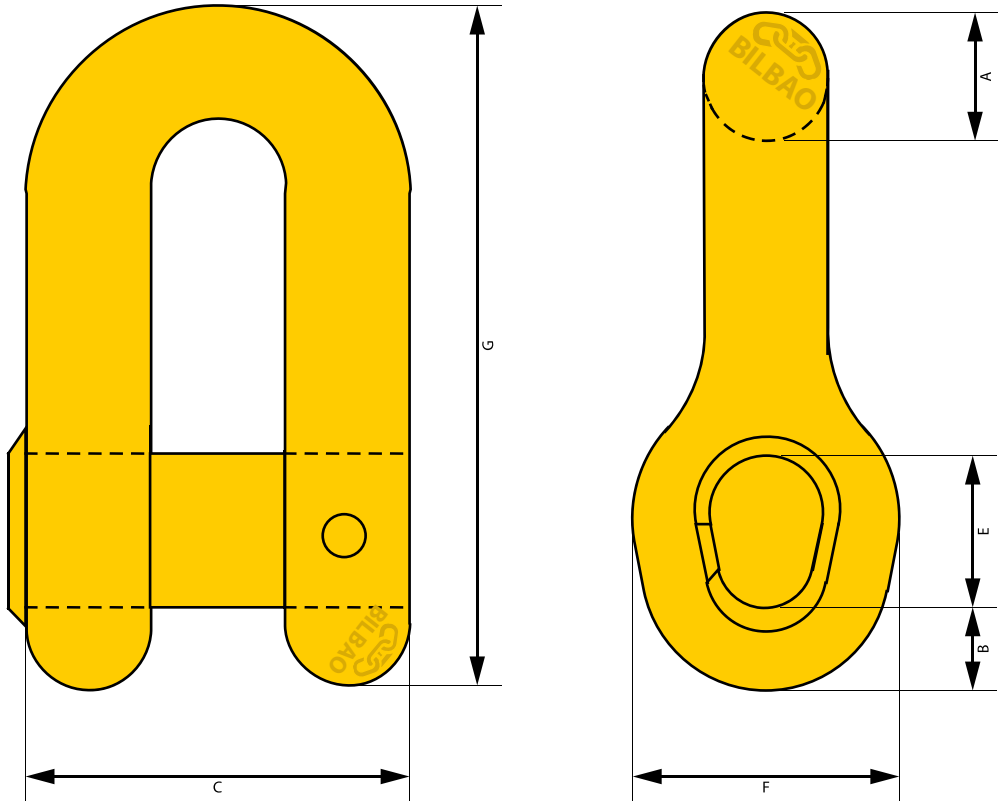

QUALITY ASSURANCE

ISO	APPROVED	REVISION	RELEASE
1704	2020	2025	PUBLIC

D = Normal diameter of chain

D (Ø)	A	B	C	E	F	G
1 D	1.3 D	0.8 D	4 D	1.6 D	2.8 D	7.1 D
50	65	40	200	80	140	355
52	68	42	208	83	146	369
54	70	43	216	86	151	383
56	73	45	224	90	157	398
58	75	46	232	93	162	412
60	78	48	240	96	168	426
62	81	50	248	99	174	440
64	83	51	256	102	179	454
66	86	53	264	106	185	469
68	88	54	272	109	190	483
70	91	56	280	112	196	497
73	95	58	292	117	204	518
76	99	61	304	122	213	540
78	101	62	312	125	218	554
81	105	65	324	130	227	575
84	109	67	336	134	235	596
87	113	70	348	139	244	618
90	117	72	360	144	252	639
92	120	74	368	147	258	653
95	124	76	380	152	266	675
97	126	78	388	155	272	689
100	130	80	400	160	280	710
102	133	82	408	163	286	724
105	137	84	420	168	294	746
107	139	86	428	171	300	760
111	144	89	444	178	311	788
114	148	91	456	182	319	809
117	152	94	468	187	328	831
120	156	96	480	192	336	852
122	159	98	488	195	342	866
124	161	99	496	198	347	880
127	165	102	508	203	356	902
130	169	104	520	208	364	923
132	172	106	528	211	370	937
137	178	110	548	219	384	973
142	185	114	568	227	398	1008
147	191	118	588	235	412	1044
152	198	122	608	243	426	1079
157	204	126	628	251	440	1115
162	211	130	648	259	454	1150

PRODUCT:

D Shackle

JOINING SHACKLE TYPE D

DRAWER	SUPERVISOR	MODEL	PROJECTION
CE	DR	CGJD	



BILBAO
ANCLAS Y CADENAS